



BEST SUBMERSIBLES

Applications

For draining garages, irrigation for gardens and vegetable gardens.
Emptying of wine cellars and basements.

Materials

Pump Body: Stainless Steel AISI 304
Impeller: Stainless Steel AISI 304
Motor Casing: Stainless Steel AISI 304
Mechanical Seal: Ceramic/Carbon/NBR
Lip Seal: NBR

Motor

Cooling via circulation of the pumped liquid.
Class F Insulation.
Protection IP68.
Continuous Operation.
Built-in thermal protection.

Limitations

Maximum passage of solids: 10mm.
Maximum immersion: 5mtrs.
Maximum temperature of liquid: 50 deg c.

Equipment

Supplied with 10mtrs of electrical cable.
Integral capacitor.
MA version c/w float switch
MS version c/w magnetic switch
Puddle sucker version available.



MA Version

MS Version



Puddle Sucker





BEST SUBMERSIBLES





BEST SUBMERSIBLES

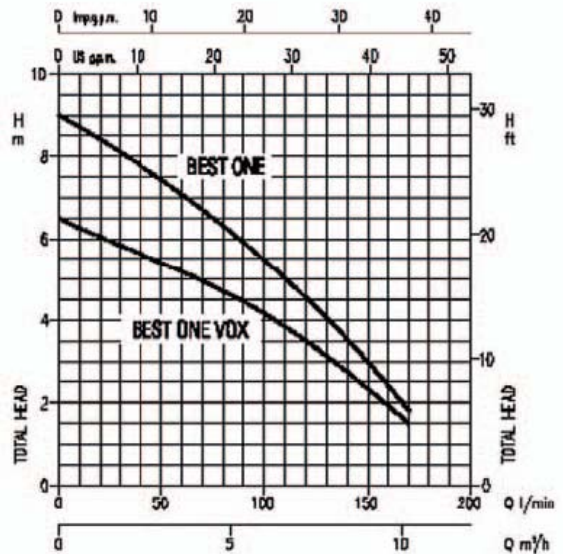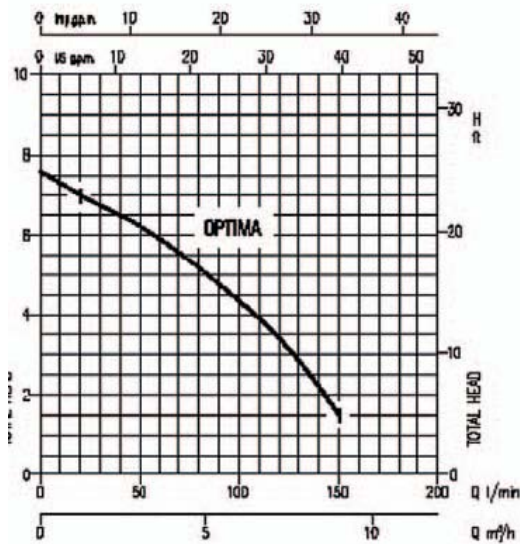

Single Phase Manual	Single Phase Automatic	Amps	Kw	HP	uF
230V	230V	230v			
Optima M	Optima MA	1.9	0.25	0.33	8
	Optima MS	1.9	0.25	0.33	8
Best One M	Best One MA	2.2	0.25	0.33	8
	Best One MS	2.2	0.25	0.33	8
Single Phase Manual	Single Phase Automatic				
110V	110V	110v			
Best One M (110V)	Best One MA (110V)	4.3	0.25	0.33	8
Three Phase Manual		400v			
Best One T		0.9	0.25	0.33	